



Benefits

- ▶ 1U 17.3" LCD console drawer
- ▶ Dual slide - LCD and keyboard slide independently
- ▶ Ultra short depth 480mm / 18.9"
- ▶ 1920 x 1080 native resolution / 16.7M colors (8-bit)
- ▶ HDMI 1.4 + DP 1.2 + VGA video input / USB KB / MS
- ▶ Dual stereo speakers for HDMI 1.4 & DP 1.2
- ▶ Ideal for open rack / short depth rack
- ▶ 104-key keyboard with touchpad
- ▶ One Man installation design
- ▶ Enhanced aesthetics with new molded front panel and 2-point lock
- ▶ 2-year standard warranty (upgradable up to 5 years)
- ▶ TAA Compliant

Options

- 3G / HD / SD-SDI Broadcast-grade input (SDI)
- DC power : 12V / 24V / 48V / 125V / 250V
- KVM integration : Refer to dual slide DF117 series

www.austin-hughes.com/PS-CV-DF117.pdf

Product Specifications

Console Port

Video input	HDMI 1.4 + DP 1.2 + VGA
KB / MS	USB interface
Console cable bundled	HDMI 1.4 cable x 1 + USB type A cable x 2

LED-backlit LCD Panel

Panel size (diagonal)	17.3"
Native resolution	1920 x 1080
Brightness (cd/m²)	300
Contrast ratio (typ.)	1000 : 1
Colors	16.7 M, 8-bit
Viewing angle (L/R/U/D)	85/85/85/85
Response time (ms)	25
Dot pitch (mm)	0.1989
Display area (mm)	381.888H x 214.812V
Surface treatment	Anti-glare, Hard-coating
Surface hardness	3H
Backlight type	LED
MTBF (hrs)	15,000

Physical

Product (W x D x H)	442 x 480 x 44 mm / 17.4 x 18.9 x 1.73 inch
Packing (W x D x H)	590 x 622 x 140 mm / 23.2 x 24.5 x 5.5 inch
Net weight	10.6 kg / 23.4 lb
Gross weight	15.6 kg / 34.4 lb

* All dimensions stated are subject to change if options are selected / integrated to base model part codes

Mounting Distance

Single console drawer	490 ~ 720 mm / 19.3 ~ 28.3 inch
-----------------------	---------------------------------

Power

Input	Auto-sensing 100 to 240VAC, 50 / 60Hz	
Consumption (console / KVM)	Screen on	Max. 14W / Max. 45W
	Power saving mode	Max. 2W / Max. 34W
	Power button off	Max. 1W / Nil

Environment


Operating temp.	0 to 55°C degree
Storage temp.	-20 to 60°C degree
Operating humidity	10~90%, non-condensing
Storage humidity	5 ~90%, non-condensing
Operating altitude	16,000 ft
Non-operating altitude	40,000 ft
Shock	10G acceleration (11ms duration)
Vibration	10~300Hz 0.5G RMS random vibration

Compliance

EMC	FCC & CE
Safety	CE / LVD & UKCA
Environment	REACH & RoHS3 / WEEE

Standard Keyboard

Ge G keyboard with touchpad

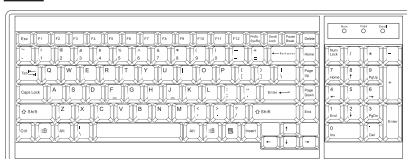

Supporting layouts

America		U.S.
EMEA	     	U.K. Germany France Russia Spain Italy
Asia	 	Japan Korea