



## Benefits

- ▶ 1U 17.3" LCD console drawer
- ▶ Dual slide - LCD and keyboard slide independently
- ▶ Ultra short depth 480mm / 18.9"
- ▶ 3840 x 2160@60Hz native resolution
- ▶ 16.7M colors support ( 8-bit )
- ▶ HDMI 2.0 + DP 1.2 + VGA video input / USB KB / MS
- ▶ Dual stereo speakers for HDMI 2.0 & DP 1.2
- ▶ Ideal for open rack / short depth rack
- ▶ 104-key keyboard with touchpad
- ▶ One Man installation design
- ▶ Enhanced aesthetics with new molded front panel and 2-point lock
- ▶ 2-year standard warranty ( upgradable up to 5 years )
- ▶ TAA Compliant

## Options

- 3G / HD / SD-SDI Broadcast-grade input ( SDI )
- DC power : 12V / 24V / 48V / 125V / 250V
- KVM integration : Refer to dual slide DK117 series  
[www.austin-hughes.com/PS-CV-DK117.pdf](http://www.austin-hughes.com/PS-CV-DK117.pdf)

## Product Specifications

## Console Port

|                       |                                           |
|-----------------------|-------------------------------------------|
| Video input           | HDMI 2.0 + DP 1.2 + VGA                   |
| KB / MS               | USB interface                             |
| Console cable bundled | HDMI 2.0 cable x 1 + USB type A cable x 2 |

## LED-backlit LCD Panel

|                           |                   |
|---------------------------|-------------------|
| Panel size ( diagonal )   | 17.3"             |
| Native resolution         | 3840 x 2160@60Hz  |
| Brightness ( cd/m² )      | 400               |
| Contrast ratio ( typ. )   | 1000 : 1          |
| Colors                    | 16.7 M, 8-bit     |
| Viewing angle ( L/R/U/D ) | 89/89/89/89       |
| Response time ( ms )      | 16                |
| Dot pitch ( mm )          | 0.0995            |
| Display area ( mm )       | 382.12H x 214.94V |
| Surface treatment         | Anti-glare        |
| Surface hardness          | 3H                |
| Backlight type            | LED               |
| MTBF (hrs)                | 15,000            |

## Physical

|                       |                                             |
|-----------------------|---------------------------------------------|
| Product ( W x D x H ) | 442 x 480 x 44 mm / 17.4 x 18.9 x 1.73 inch |
| Packing ( W x D x H ) | 590 x 622 x 140 mm / 23.2 x 24.5 x 5.5 inch |
| Net weight            | 10.6 kg / 23.4 lb                           |
| Gross weight          | 15.6 kg / 34.4 lb                           |

\* All dimensions stated are subject to change if options are selected / integrated to base model part codes

## Mounting Distance

|                       |                                 |
|-----------------------|---------------------------------|
| Single console drawer | 490 ~ 720 mm / 19.3 ~ 28.3 inch |
|-----------------------|---------------------------------|

## Power

|                                |                                       |                     |
|--------------------------------|---------------------------------------|---------------------|
| Input                          | Auto-sensing 100 to 240VAC, 50 / 60Hz |                     |
| Consumption<br>(console / KVM) | Screen on                             | Max. 35W / Max. 52W |
|                                | Power saving mode                     | Max. 2W / Max. 18W  |
|                                | Power button off                      | Max. 1W / Nil       |

## Environment


|                        |                                    |
|------------------------|------------------------------------|
| Operating temp.        | 0 to 55°C degree                   |
| Storage temp.          | -20 to 60°C degree                 |
| Operating humidity     | 10~90%, non-condensing             |
| Storage humidity       | 5 ~90%, non-condensing             |
| Operating altitude     | 16,000 ft                          |
| Non-operating altitude | 40,000 ft                          |
| Shock                  | 10G acceleration ( 11ms duration ) |
| Vibration              | 10~300Hz 0.5G RMS random vibration |

## Compliance

|             |                      |
|-------------|----------------------|
| EMC         | FCC & CE             |
| Safety      | CE / LVD & UKCA      |
| Environment | REACH & RoHS3 / WEEE |

## Standard Keyboard

**Ge** G keyboard with touchpad

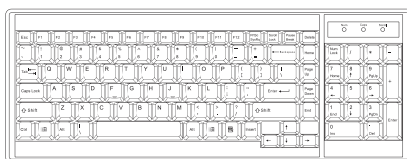

## Supporting layouts

|         |  |                                 |
|---------|--|---------------------------------|
| America |  | U.S.                            |
| EMEA    |  | U.K. Germany France Spain Italy |
| Asia    |  | Japan Korea                     |