


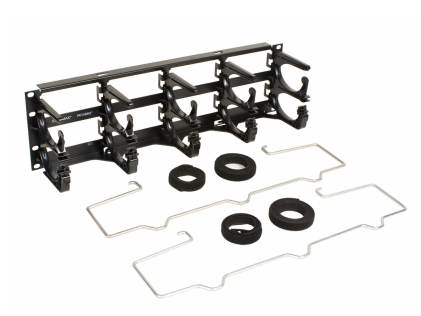

GigaSPEED XL® PATCHMAX® GS3 Category 6 U/UTP 3U Patch Panel Kit

OBSOLETE

Replaced By:

760062364 GigaSPEED XL® PATCHMAX® GS3 Category 6 U/UTP Copper Patch Panel, 48 Port PM-GS3-48

Product Classification

Regional Availability	Asia Australia/New Zealand EMEA Latin America North America
Portfolio	SYSTIMAX®
Product Type	RJ45 patch panel
Product Brand	GigaSPEED XL® PATCHMAX®
Product Series	NA

General Specifications

ANSI/TIA Category	NA
Cable Type	Unshielded
Color	Black
Intelligence Type	Passive
Panel Style	Flat
Rack Type	EIA 19 in
Rack Units	2
Total Ports, quantity	48

Dimensions

Height	132.5 mm 5.217 in
Width	482.6 mm 19 in
Depth, with cable management	220.02 mm 8.662 in

Material Specifications

Material Type	High-impact, flame retardant, thermoplastic Powder-coated steel
---------------	---

Environmental Specifications

Operating Temperature	-10 °C to +60 °C (+14 °F to +140 °F)
Storage Temperature	-40 °C to +70 °C (-40 °F to +158 °F)
Relative Humidity	Up to 95%, non-condensing
Flammability Rating	UL 94 V-0
Safety Standard	UL cUL

Packaging and Weights

Packaging Material	Eco-friendly, single-use plastics-free
Packaging quantity	1

Regulatory Compliance/Certifications

Agency	Classification
CHINA-ROHS	Above maximum concentration value
CHINA-ROHS	Below maximum concentration value
ISO 9001:2015	Designed, manufactured and/or distributed under this quality management system
REACH-SVHC	Compliant as per SVHC revision on www.commscope.com/ProductCompliance
ROHS	Compliant/Exempted
ROHS	Compliant
UK-ROHS	Compliant/Exempted

UK-ROHS

Compliant

