

DHI-ASI7213G-PW

Dahua 7-inch POE Face Recognition Access Controller



- Features a 7-inch LCD screen with a resolution of 600 (H) x 1024 (V) .
- 4MP CMOS Visible Light Lens + 2MP CMOS IR Lens that supports WDR.
- Unlocks through face, card, password, Bluetooth and QR code. You can also combine these methods to create your own personal unlock methods and designate unlock periods.
- Supports up to 100,000 users, 100,000 faces, 500,000 cards, 100,000 passwords, 50 administrators, and 300,000 records.
- Recognizes faces 0.3 m to 3.0 m away (0.98 ft–9.84 ft) with an accuracy of 99.9% and a 1:N comparison time of 0.1 seconds per person.
- Connects with the door security module to prevent forced entry and enhance security.
- Supports visitor QR codes and the doorbell function.
- Supports video intercom and you can operate on the app.
- Supports TCP/IP and Wi-Fi connectivity, PoE and is IP65 rated.
- Plays advertisements in video and image formats.
- Supports external power output, with a maximum output of 12V 1A under 12 VDC power supply, and a maximum output of 12V 0.5A under PoE power supply.
- Supports expansion modules such as fingerprint, QR code, dual-frequency card swiping and doorbell.

Technical Specification

System

Main Processor	Embedded Processor
Button Type	Touch button
Network Protocol	IPv4;RTSP;UDP;P2P;IPv6;RTP;TCP;SIP
OSDP Protocol	Yes
Interoperability	ONVIF;CGI
SDK and API	Yes

Basic

Product Type	Standalone
Display Screen	7-inch display screen
Screen Type	Capacitive Touchscreen
Screen Resolution	600 (H)×1024 (V)
Camera	4MP+2MP CMOS HD dual camera
WDR	120 dB
Light Compensation	Auto IR
Voice Prompt	Yes
Speaker	Yes
Casing Material	Glass; PC; PC+GF

Function

Verification Method	Card;Password;QR Code;Face Recognition;Bluetooth
Sub-Module Expansion	Yes
Sub-Module Verification Method	Card swiping;Fingerprint;QR Code

Door Open Notification Mode	Yes
Frequency Range	2400-2483.5 MHz
Max. Transmission Power	≤20 dBm@2400-2483.5 MHz;
Period List	128
Holiday Period	128
Network Update	Yes
First User Unlock	Yes
Remote Verification	Yes
Restricted List/Trusted List	Yes
Bluetooth	Yes
Bluetooth Standard	BLE5.4
Advertisement Playing	Plays advertisements in video and image format
Peripheral Card Reader	Supports 1 × RS-485 card reader and 1 × Wiegand card reader
Multi-user Authentication	Yes
Real-time Monitoring	Yes

DHI-ASI7213G-PW

Multi-factor Authentication	Yes
Capture Function	Yes
Web Configuration	Yes
Auto Registration	Yes

RFID

Card Type	IC card;Desfire card (EV3,Compatible with Dahua card by default);Felica card
Modulation Type	AM
Frequency Range	13.56 MHz
Max. Transmission Power	42 dBuA/m @10 m

Network

Max. Transmission Power	≤20 dBm@2400-2483.5 MHz; ≤23 dBm@5150-5250 MHz; ≤20 dBm@5250-5350 MHz; ≤27 dBm@5470-5725 MHz; ≤14 dBm@5725-5850 MHz
Wi-Fi	Yes
Wireless Standard	IEEE802.11b/g/n/a/ac/ax
Wireless Frequency Range	2400-2483.5 MHz, 5150-5350 MHz, 5470-5725 MHz, 5725-5850 MHz
Wireless Security Encryption	WPA/WPA2;WPA-PSK/WPA2-PSK

Performance

Card Reading Distance	0 cm - 3 cm
Face Recognition Height Range	0.9 m - 2.4 m
Face Recognition Distance	0.3 m - 3.0 m
Face Recognition Accuracy	99.9%
Face Recognition Time	0.1 s

User

User (Card) Type	General user/VIP user/patrol user/guest user/blocklist user /other user/custom user 1/custom user 2
------------------	---

Capacity

Face Image Capacity	100,000
User Capacity	100,000
Card Capacity	500000
Password Capacity	100000
Record Capacity	300000

Port

RS-485	1
RS-232	1
Wiegand	1, input/output configurable
USB	1 × USB 2.0 port
Network Port	1 × 10/100/1000 Mbps self-adaptive Ethernet port
Alarm Input	2 (switch quantity)
Alarm Output	1

Alarm Linkage	Yes
Doorbell	Yes, shared with alarm output port
Exit Button	Yes
Door Status Detection	Yes
Lock Control	2
Audio Port	Yes
Power Output Port	Yes (Under DC power supply, output 12 VDC, 1 A; Under PoE power supply, output 12 VDC, 0.5 A)
Audio Output Port	Yes

Alarm

Anti-pass Back	Yes
Tamper Alarm	Yes
Duress Alarm	Yes
Door Sensor Timeout	Yes
Intrusion	Yes
Illegal Card Exceeding Threshold	Yes

General


Power Adapter	Optional
Power Supply	12 VDC, 2 A; Standard PoE
Protection	IP65
Power Consumption	≤24 W
Product Dimensions	219.0 mm × 106.3 mm × 20.8 mm (8.62" × 4.19" × 0.82") (H × W × D)
Packaging Dimensions	297.0 mm × 163 mm × 71 mm (11.69" × 6.42" × 2.80") (H × W × D)
Transport Package Dimensions	390 mm × 320 mm × 360 mm (15.35" × 12.60" × 14.17") (H × W × D)
Operating Temperature	−30 °C to +60 °C (−22 °F to +140 °F) (12 VDC power supply); −30 °C to +45 °C (−22 °F to +113 °F) (PoE power supply)
Operating Humidity	0% - 90% RH (Non-condensing)
Operating Altitude	0 m - 1300 m (0 ft - 4265.09 ft)
Operating Environment	Indoor;Outdoor
Gross Weight	0.80 kg (1.76 lb)
Accessory	Wall-mount bracket(Standard)
Installation	Wall Mount;Floor Bracket Mount;Desk Bracket Mount;Turnstile Mount;86 mm Junction Box Mount
Storage Temperature	−20 °C to +70 °C (−4 °F to +158 °F)
Storage Humidity	30% - 75% RH (Non-condensing)

DHI-ASI7213G-PW

Ordering Information

Type	Model	Description
Face Recognition Access Controller	DHI-ASI7213G-PW	Dahua 7-inch POE Face Recognition Access Controller

Installation

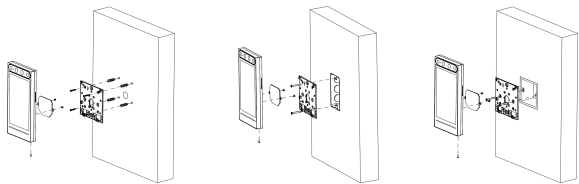

Dimensions (mm[inch])

