

DHI-VTA8311A-4

Dahua Wired&Wireless Alarm Column



- With its 2-MP high-definition camera, the device supports video and snapshot linkage, and OSD overlay on the webpage.
- 30 W speakers and highly sensitive microphones are included.
- The 2 RJ-45 10/100 Mbps self-adaptive Ethernet ports allow alarms to be reported to 2 alarm receiving centers at the same time.
- Supports two-way voice talk and calling through the platform or management device to broadcast your voice.
- Supports being linked to alarm receiving centers. Similar to a landline telephone, the included PSTN module allows phone calls to be made.
- Supports accessing PTZ cameras, bullet cameras, and LEDs.
- Built with an LCD display that can play advertisements and provide guidance information.

Scene

Suitable for different scenes such as schools, squares, transit stations, scenic spots, and hospitals.

Technical Specification

Port

Alarm Input	2
Alarm Output	2
Network Port	2 × RJ-45 10/100 Mbps self-adaptive Ethernet port
Telephone Line	1 × PSTN
SIM Card Slot	Yes (4G is optional)
RS-232	1
RS-485	1 (supports accessing a dot-matrix display)
Auxiliary Power Output	1 × 12 V/1 A
Screen	10.1" LCD-1280 × 800-5.38 W-LVDS port
SD Card Slot	1 × Micro SD card slot (maximum 256 GB)

Video & Audio

Video Compression	H.264/H.265
Audio Input	Supports 1 audio input channel with a maximum pickup distance of 5.0 m (16.40 ft); Supports accessing an external pickup
Audio Output	Supports 1 audio output channel with a maximum power of 30 W; Supports accessing an active speaker
Audio Compression	G.711a\G.711U\PCM\G.726
Volume Control	Yes
Two-way Audio	Yes
Field of View	D: 105°; H: 88°; V: 44°
Image Type	Supports importing images in PNG, JPG, and BMP formats for advertisements
Resolution	704 × 480; 640 × 480; 1280 × 720; 1920 × 1080
Frame Rate	1-25 fps
Illumination Mode	IR illumination
Illumination Range	30 m (98.43 ft)
Day/Night Switch	Yes

Function

Indicator Light	2 function indicators (alarm and alarm button)
Button	1 × alarm button
External Accessories	Vertical pole
Phone Call	Yes
Video Linkage	Yes
Camera Video and Snapshot Linkage	Yes
OSD Overlay	Up to 5 lines can be added with 60 English letters in each line on webpage
Arm and Disarm	Arming/Disarming on webpage
Remote Update	Yes
Network Protocol	DHCP; UPNP; NTP
FTP Server	Yes
Tamper	2-channel door detector tamper alarm
User Management	64 remote users
Logs	Stores up to 10,000 logs, including alarm events and operation logs

DHI-VTA8311A-4

Search for Remote Alarm Event	Yes
General	
Language	English
Power Supply	110–240 VAC
Power Consumption	≤20 W (Idling) (without speakers); ≤55 W (Full load)
Operating Temperature	–30 °C to +65 °C (–22 °F to +149 °F)
Operating Humidity	10%–90% (RH)
Product Dimensions	2,410 mm × 340 mm × 330 mm (94.88" × 13.38" × 12.99")(L × W × H)
Net Weight	95 kg (209.44 lb)
Gross Weight	110 kg (242.51 lb)
Installation	footing cage mount
Casing Material	Galvanized plate
Protection	IPX5
Anti-corrosion Level	Basic Protection *The products are designed for general use and are applicable even in areas with no specific requirements for anti-corrosion protection.
Packaging Dimensions	2667 mm × 615 mm × 715 mm (105.00" × 24.21" × 28.15")(L × W × H)

Ordering Information		
Type	Model	Description
Emergency Phone Terminal	DHI-VTA8311A-4	Dahua Wired&Wireless Alarm Column
Accessories (Optional)	ARA58-F-EN	Wired
	ARA58-F-EN	Wired
	DH-LEDO9632	户外双行六字双色屏 96*32

Accessories

Optional:




ARA58-F-EN
Wired




ARA58-F-EN
Wired



DH-LEDO9632
户外双行六字双色屏
96*32



Dimensions (mm[inch])

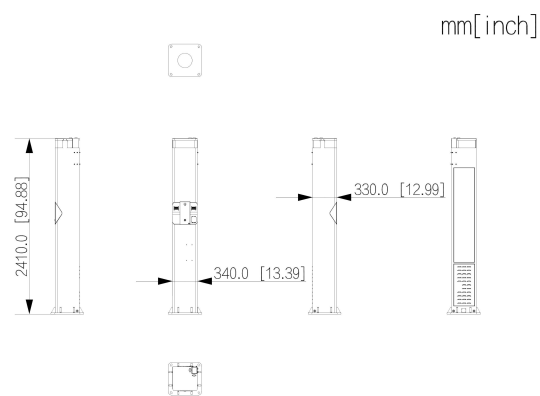

Application

