

DS-D5032S1-2P0S
31.5 inch Monitor



- Supports 1366 × 768 HD display
- 60 Hz continuous high-speed refresh rate for smoother dynamic performance
- Ultra-narrow three-sided bezel with a slim profile
- Low blue light design for eye care
- Multiple interfaces to meet daily needs

▪ Specification


Display	
Screen Size	31.5 inch,80 cm
Active Display Area	697.6 (H) mm × 392.2 (V) mm, 27.4 dm ²
Physical Resolution	1366 × 768
Backlight	D-LED
Brightness	200 cd/m ²
Color Depth	8 bit,16.7 M
Contrast Ratio	1200:1
Surface Treatment	Haze 1%,2 H
Reliability	7 × 16 h
Refresh Rate	60 Hz
Interface	
Video & Audio Input	HDMI 1.4 × 3
Video & Audio Output	Audio Out × 1
Data Transmission Interface	USB 2.0 × 2
Power	
Power Supply	100 to 240 VAC, 50/60 Hz
Power Consumption	≤ 45 W
Standby Consumption	≤ 0.5 W
Working Environment	
Working Temperature	0 °C to 40 °C (32 °F to 104 °F)
Working Humidity	20% RH to 80% RH (without condensation)
Storage Temperature	-20 °C to 60 °C (-4 °F to 140 °F)
Storage Humidity	10% RH to 90% RH (without condensation)
General	
Standby Time	60s
Casing Material	Plastic
VESA	100 (H) mm × 200 (V) mm
Bezel Width	1.0 mm (Top / Left / Right) , 18 mm (Bottom)
Product Dimension (W × H × D)	With base: 715.69 (W) mm × 476.68 (H) mm × 208.09 (D) mm (28.18"×18.77" × 8.19") Without base: 715.69 (W) mm × 421.25 (H) mm × 70.68 (D) mm (28.18"× 16.58" × 2.78")
Package Dimensions (W × H × D)	798 (W) mm × 530 (H) mm × 141 (D) mm (31.42 " × 20.87 " × 5.55 ")
Net Weight	5 ± 0.5 kg (11.02 ± 1.1 lb.)
Gross Weight	5.86 ± 0.5 kg (12.9 ± 1.1 lb.)
Packing List	Monitor × 1 , HDMI cable × 1 , Base Assembly × 2 , User Manual × 1 , Remote control × 1

▪ Physical Interface

Interface	Description	Interface	Description
COAX	COAX digital signal input	HDMI	HDMI digital signal input
CVBS	CVBS digital signal input	Audio Out	Audio digital signal output
USB	USB2.0,input interface		

COAX HDMI1 HDMI2 HDMI3 CVBS/AUDIO IN © USB1/2

▪ Dimension

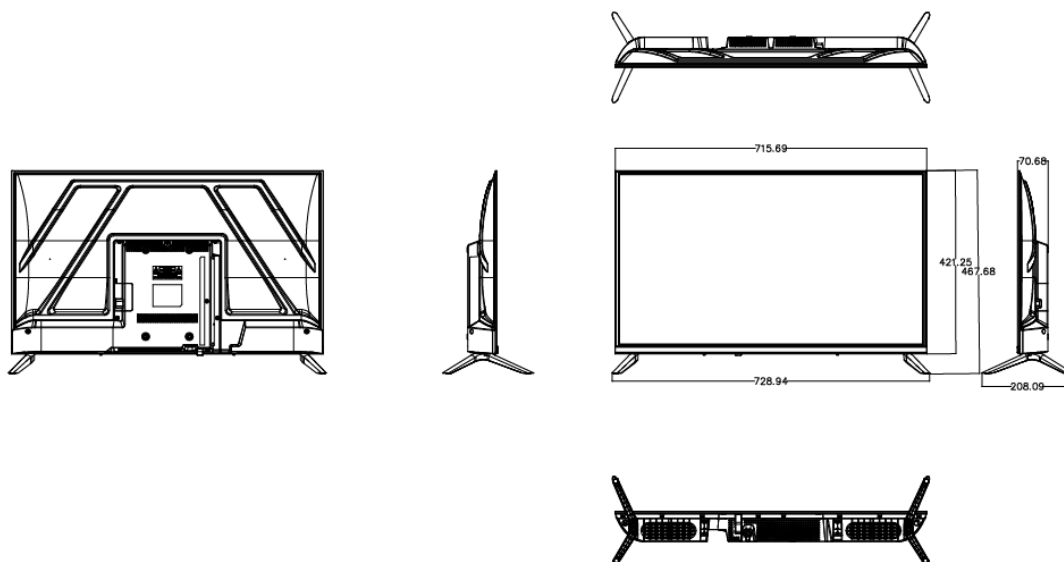

▪ Accessory

▪ Optional

DP-D501940-1X1-Q

1-NW-Q0.1-TY/V20

0



See Far, Go Further



www.hikvision.com
support@hikvision.com

