

DS-MDP004 Rugged Tablet



- 10.1-inch display, IPS LTPS 1920 × 1200.
- Self-developed high-performance barcode recognition technology can efficiently read barcodes of various formats.
- The algorithm has strong robustness and can effectively handle situations such as dirty, damaged, and low contrast barcodes.
- Supports various one-dimensional codes, including: EAN/UPC/ISBN13.
Codabar/ITF25/ITF14/Matrix25/Code39/Code93/Code128 Code11/MSI/IND25.
- Supports various types of QR code: DM/QR/MicroQR/Aztec.
- Supports NFC protocol: ISO15693, ISO14443A/B, ISO14443A.
- Front camera: 5 megapixel, Rear camera: 13 megapixel.
- 10000 mAh large capacity battery, longer life.

▪ Specification


Camera	
Image Sensor	Front camera: 5 MP; Fix-focus Rear camera: 13 MP; Auto-focus
Flashing Light	Supported
Screen	
Screen Size	10.1"
Screen Type	IPS; capacitive touch panel; multi-touch, operation with wet hands, and gloved hands.
Resolution	1920 × 1200 pixel
Storage	
RAM	4 GB
ROM	64 GB
CPU	8 cores, 2 cores 2.0 GHz + 6 cores 1.8 GHz
Extended Storage	1 TF card (Max. 2 TB)
Wireless Network	
Cellular Network	Only available for models with/GLE: GSM: B2/3/5/8 WCDMA: B1/2/5/8 TD-SCDMA: B34/39 LTE-TDD: B34/B38/B39/B40/B41 LTE-FDD: B1/B3/B5/B7/B8/B20
Wi-Fi Protocol	802.11 a/b/g/n/ac
Wi-Fi Frequency Band	2.400 to 2.483 GHz, 5.15-5.25 GHz, 5.725-5.850 GHz
Bluetooth	BT5.0
Positioning Mode	GPS, BeiDou, Glonass, AGPS
NFC	Supported
Interface	
Button	Side Keys Volume+, Volume-, Right Scan Key, Power Button, Function Key
Keypad	3 Virtual keys + 5 Side keys
SIM Card	Only available for models with/GLE/5G: 2 (Nano-SIM)
Charging Interface	Type C
PASM	Supported
General	
Operating System	Android 14, without GMS
Dimension	263.6 × 183 × 17.7 mm
Weight	910 g
Power	Input: AC 100 to 240 V, 50 to 60 Hz Output: Default DC 5 V 2 A adapter, supports up to DC 9 V 2 A adapter.
Client	MDM
Vibration Motor	Supported
Audio	Supported
Gyroscope	Optional
G-sensor	Supported
Distance Sensor	Supported
Light Sensor	Supported
MIC	Supported

Drop Specifications	1.5 m
Operating Condition	Operating Temp: -15 °C to 55 °C Humidity: 95% or less (non-condensing)
Sealing	IP 67
Electro Static Discharge (ESD)	±15 KV air discharge
Battery	
Battery Type	Lithium-ion battery, integral
Capacity	10000 mAh

▪ Available Model

DS-MDP004/GLE/4&64/SC(B)

▪ Dimension

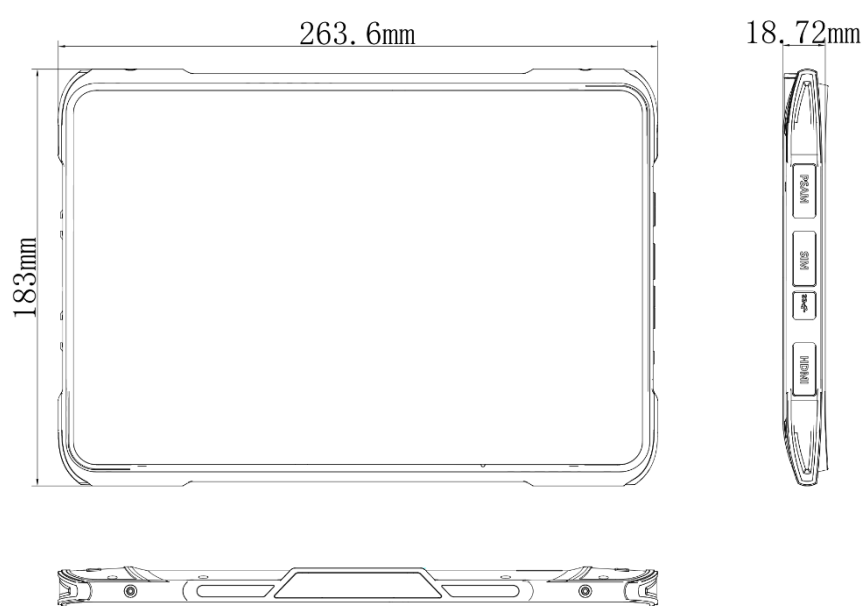

See Far, Go Further



www.hikvision.com
support@hikvision.com

